


ZORA 1U MPO Pre-Terminated Fiber Optic Patch Panel

ZORA 1U MPO Pre-Terminated Fiber Optic Patch Panel for data center wiring area fiber optic backbone connection hub distribution cable, installed in 19-inch racks and cabinets; installation of MPO pre-terminated module box or MPO adapter panel, the maximum realization of the management of optical fiber 288 cores.

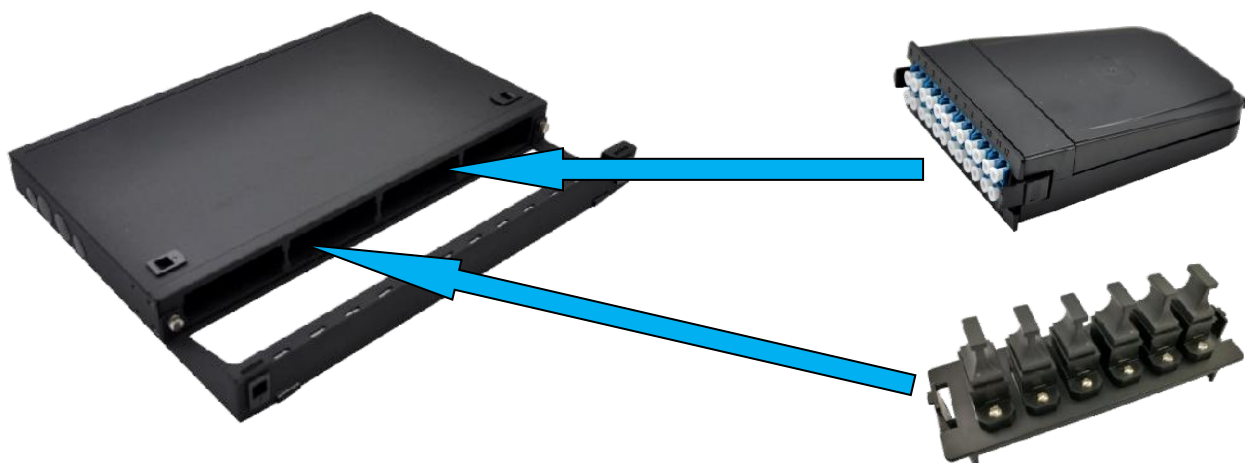

ZORA 1U MPO Pre-Terminated Fiber Optic Patch Panel Features

- 1、1U can be installed with 4 MPO pre-terminated modular boxes, which can manage up to 96 fiber cores;
- 2、1U can install 4 MPO adapter panels, the maximum number of fiber cores can be managed up to 288 cores;
- 3、Made of high-quality cold-rolled steel plate, the thickness of the main plate is 1.5mm;
- 4、Removable cable management frame, beautiful and convenient;
- 5、No burrs, no bubbles, no screw fixing, snap-on top cover, tool-free opening.

Technical Specifications

Construction	
Body	
Body Material	Adoption of high-quality SPCC cold-rolled steel plate
Board Thickness	1.5mm
Sizes	L430mm*W355mm*H44mm
Body Surface	The surface has been sprayed with special treatment, which is strong, beautiful and not easy to be scratched.
Front	
Positive cable manager	Removable cable tray on front