


## ZORA 3U MPO Pre-Terminated Fiber Optic Patch Panel

ZORA 3U MPO Pre-Terminated Fiber Optic Patch Panel for data center wiring area fiber optic backbone connection hub distribution cable, installed in 19-inch racks and cabinets; installation of MPO pre-terminated module box or MPO adapter panel, the maximum realization of the management of optical fiber 288 cores.

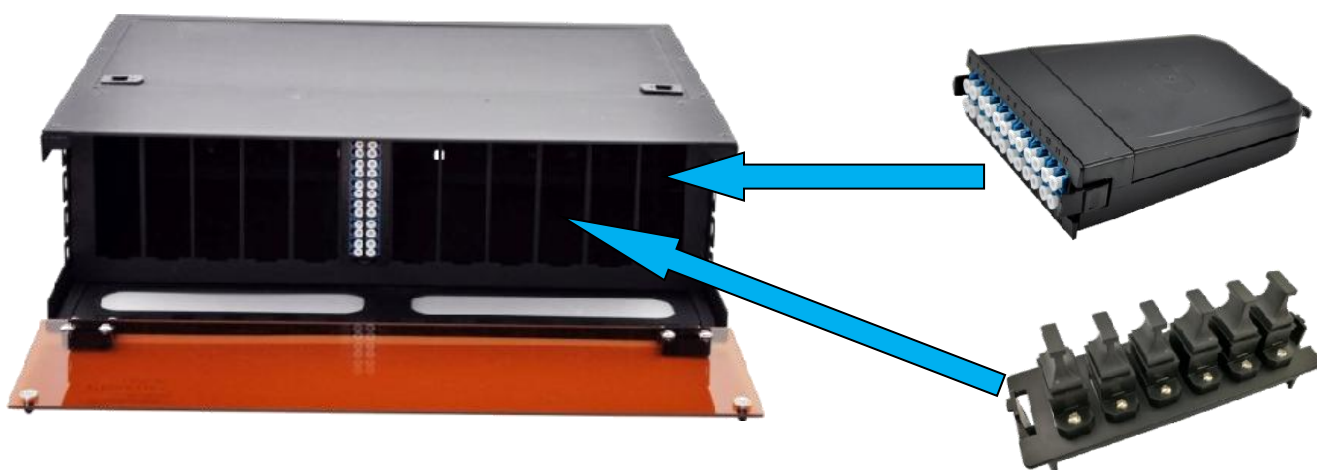

### ZORA 3U MPO Pre-Terminated Fiber Optic Patch Panel Features

- 1、 3U can be installed with 12 MPO pre-terminated modular boxes, which can manage up to 288 fiber cores;
- 2、 3U can install 12 MPO adapter panels, the maximum number of fiber cores can be managed up to 864 cores;
- 3、 Made of high-quality cold-rolled steel plate, the thickness of the main plate is 1.5mm;
- 4、 Removable cable management frame, beautiful and convenient;
- 5、 No burrs, no bubbles, no screw fixing, snap-on top cover, tool-free opening.

## Technical Specifications

Construction	
Body	
Body Material	Adoption of high-quality SPCC cold-rolled steel plate
Board Thickness	1.5mm
Sizes	L430*W355*H131.4mm
Body Surface	The surface has been sprayed with special treatment, which is strong, beautiful and not easy to be scratched.
Front	
front panel	High quality acrylic cover, beautiful and generous